


# LEARN JAVA THE EASY WAY

A HANDS-ON INTRODUCTION  
TO PROGRAMMING

BRYSON PAYNE

COVERS  
JAVA  
8 AND 9

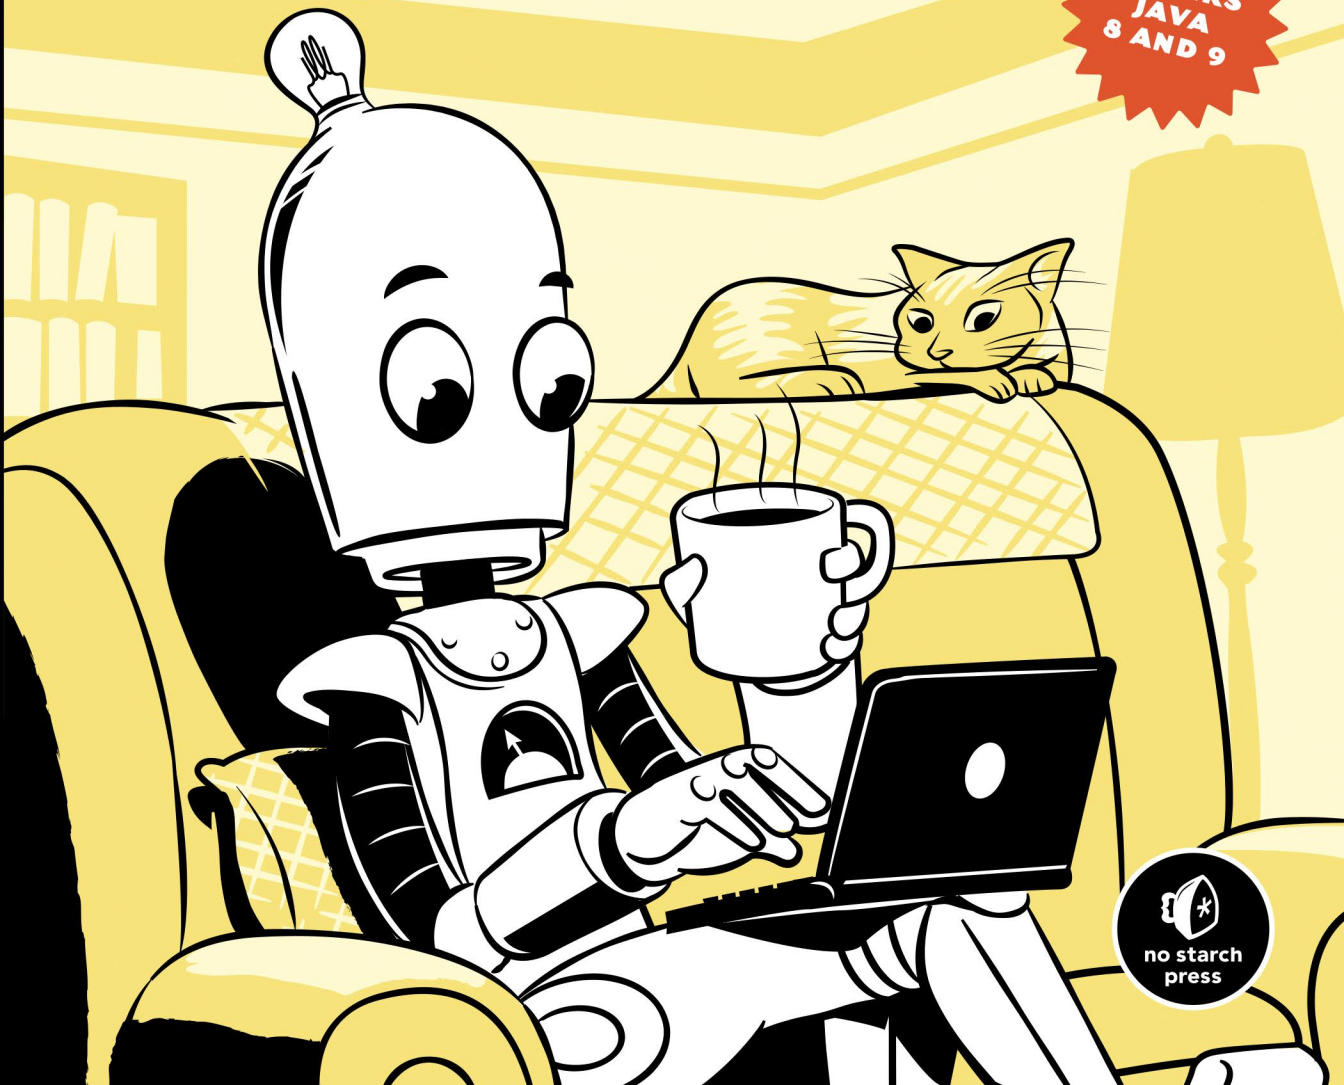



# INDEX

## Symbols

- + (addition operator), 12
- = (assignment operator), 13–15, 245, 276
- { } (braces), 23
- + (concatenation operator), 12–13, 27, 30, 130–131
- (decrement operator), 130
- . (dot operator), 59, 68
- " (double quotation marks), 27
- == (equal-to operator), 30, 276
- // (forward slashes), 23, 28
- > (greater-than operator), 30, 60
- ++ (increment operator), 129
- < (less-than operator), 30, 60
- % (modulo operator), 139
- != (not-equal-to operator), 29
- ; (semicolon), 24
- ~ (tilde), 16
- \* (wildcard character), 46

## A

- About screen, 113–114
- AbsoluteLayout value, 240
- ActionListener class, 63–64, 226
- action listeners, 46–47, 68, 234
- actionPerformed() method, 63, 154–156, 227–228, 234
- addActionListener() method, 63
- addMouseListener() method, 213
- addition operator (+), 12
- AlertDialog class, 113–114
- alert dialog pop-up, 113–114
- Android devices
  - connecting to computer, 101
  - Developer mode, 100–101
  - preparing to run apps, 100
  - testing apps on, 100–102
- Android emulator
  - BubbleDraw app, 260–261
  - Hi-Lo guessing game, 94–99
  - Secret Messages app, 188–189

- Android package files (APK), 101–102
- Android Studio, 1. *See also*
  - BubbleDraw app (Android mobile version);
  - Hi-Lo guessing game (Android mobile version);
  - Secret Messages app (Android mobile version)
- activity selection, 78–79
- Android emulator, 94–99
- code completion, 91–92, 278
- correcting spelling errors, 275
- default project view, 80
- Design tab, 80–81
- grouping symbols, 277–278
- importing classes automatically, 86
- installing, 8–9
- SDK or API levels, 78
- starting projects, 76–80
- Target Android Devices window, 78
- updating, 176
- widgets, 81
- animation, 225–229. *See also*
  - BubbleDraw app (Android mobile version);
  - BubbleDraw app (GUI version)
- adding timer, 226
- frame rate, 225, 241, 253
- preparing, 227–228
- setting timer, 226–227
- starting timer, 229
- threading, 249
- anonymous inner classes, 63, 91, 155, 167, 184, 210
- APK (Android package files), 101–102
- application program interface (API) levels, 78
- apply() method, 119
- arguments, 155
- arithmetic operators (+, -, \*, /), 12
- ArrayList data structure, 205–210, 253

assignment operator (=), 13–15,  
245, 276  
attributes, 26

## B

binary search, 40  
*bin* folder, 1, 11–12, 141–143  
Boolean expressions, 65  
braces { }, 23  
break statement, 113  
Bubble class, 200–205, 255–257  
    attributes for, 201  
    defining bubbles, 200–202  
    methods for, 202–205  
    modifying, 255–257  
BubbleDraw app (Android mobile  
    version)  
    adding animation variables,  
        252–253  
    adding testBubbles() method,  
        258–259  
    BubbleView() constructor, 254  
    custom app launcher icon, 268–270  
        adding, 268–269  
        changing app name, 270  
        creating, 268  
        displaying, 269–270  
    drawing with onDraw() method,  
        257–258  
    handling onTouchListener events,  
        259–260, 264–265  
    modifying Bubble class, 255–257  
    running in Android emulator,  
        260–261  
    setting up project, 250–252  
    testing, 258–261, 266–267  
    threading and multitasking,  
        261–264  
    touch event handler code, 264–265  
        combining single-pointer  
            and multitouch events,  
            271–272  
        multitouch, 266–267  
BubbleDraw app (desktop version)  
    building frame, 199  
    creating Bubble class, 200–205  
        attributes for, 201  
        defining bubbles, 200–202  
        methods for, 202–205  
    creating project files, 198–199

mouse events, 210–217  
    clicks, 212–214  
    creating reusable event listener,  
        211–212  
    drags, 214–215  
    wheel events, 215–217  
pixelated effect, 219–220  
size variable limits, 218  
storing bubbles in ArrayList,  
    205–210  
    adding constructor, 206–207  
    adding method, 207–208  
    testing BubblePanel class, 208–210  
BubbleDraw app (GUI version)  
    adding transparency, 224–225  
    animation, 225–229  
        adding timer, 226  
        frame rate, 225, 241  
        preparing, 227–228  
        setting timer, 226–227  
        starting timer, 229  
    building GUI, 232–235  
        event handlers, 234–235  
        setting up panel and buttons,  
            232–233  
    collision detection, 235–239  
        hard bounces, 238–239  
        soft bounces, 236–238  
    copying project and renaming Java  
        file, 222–223  
    fixed speed, 244–245  
    pixelated effect, 245–247  
    preventing stationary bubbles, 244  
    random speed and direction,  
        229–232  
    sharing app as runnable  
        JAR file, 243  
    speed control slider, 240–243  
        customizing, 241  
        event handler, 242–243  
BubbleDraw class, 199  
BubbleListener class, 212–214, 227  
Bubble() method, 202–204  
BubblePanel class, 199, 201, 203,  
    206–209, 214–215  
BubbleView class, 251–255  
BubbleView() constructor, 254  
Button component, 82, 84, 87, 180  
buttons  
    adding, 82  
    adding event listeners, 62–64,  
        91–94

- adding labeled, 46–47, 54
- Clear button, 232–235
- Click me! button, 46–47
- Encode/Decode button, 152, 154–156, 159–164, 167, 179–180, 182–186
- floating action button (fab), 84–85, 190–193
- Guess! button, 54–55, 62–63, 66–69, 82, 93, 99
- Move Up ^ button, 172–173, 196
- OK button, 114
- Pause/Start button, 232–235
- Play Again button, 66, 73–74
- showing and hiding, 73–74

## C

- Caesar cipher, 125–126
- camel case, 14, 21
- Canvas class, 256
- case sensitivity, 14, 21, 274
- casts (type casts), 24, 132
- chained assignment, 245
- charAt() method, 130–132
- char data type, 132
- checkGuess() method, 58–59, 65, 68–69, 73, 88–89, 106, 116, 120
- child classes, 49
- classes, 21, 86–87
  - anonymous inner classes, 63, 91, 155, 167, 184, 210
  - creating, 21–23, 200–204
  - extending, 49
  - importing, 25
  - public, 23
  - superclasses, 48
- Clear button, 232–235
- Click me! button, 46–47
- close() method, 37, 135
- code completion, 91–92, 278
- code recommenders, 59, 274–275
- collision detection, 235–239
  - hard bounces, 238–239
  - soft bounces, 236–238
- Color Chooser dialog (in Eclipse), 160, 165
- Color class, 201, 203, 224, 255–256
- command line apps, running without Eclipse, 141–144
  - opening command line window, 142–144
  - workspace folders, 141–142

- comments, 23, 28
- comparison operators
  - equal to (==), 30, 276
  - greater than (>), 30, 60
  - less than (<), 30, 60
  - not equal to (!=), 29
- compiler directives, 91
- concatenation operator (+), 12–13, 27, 30, 130–131
- conditional expressions, 30
- conditions, 28
- confirm dialogs, 163
- content assist, 59, 274–275
- content panes, 52

## D

- data structures, 205
- debugging, 28
  - case sensitivity, 274
  - code completion, 278
  - commenting out, 28
  - grouping symbols, 276–278
  - spelling errors, 274–276
  - statement completion, 278
  - syntax coloring, 273
  - USB debugging, 100–102, 188, 267
- decrement operator (--), 130
- defaultCloseOperation property, 51–52
- Dimension class, 64–65
- dismiss() method, 114
- dot notation, 26
- dot operator (.), 59, 68
- double quotation marks ("), 27
- double variable type (double-precision floating point), 14
- do-while loops, 33–35
- draw() method, 204–205, 247, 256
- drawOval() method, 250, 256–257
- drawRect() method, 204

## E

- Eclipse, 1. *See also* BubbleDraw app (GUI version); Hi-Lo guessing game (GUI version); Secret Messages app (GUI version)
  - automatic indentation clean-up, 35
  - content assist and code recommenders, 59, 274–275

Eclipse (*continued*)

- correcting spelling errors, 274–275
- creating classes, 21–23
- creating new Java project, 20–21
- customizing appearance of, 7–8
- grouping symbols, 277
- installing, 3–4
- perspectives, 21
- saving code, 25
- setting up
  - default workspace storage
    - location, 4–5
  - installing WindowBuilder Editor, 6–7
    - modifying to run with Java 9, 5
  - setting up GUI projects, 48–49
  - themes, 7
  - WindowBuilder Editor, 50
    - Design tab, 50
    - installing, 6–7
    - Palette pane, 52–54
    - Properties pane, 51–52
    - Source tab, 56
  - workspace folders, 4–5, 141–142
- /edit command, 16
- editor action, 103
- EditText component, 82, 84, 87, 102, 107, 178, 185
- else-if statements, 138–139
- else statements, 31
- encapsulation, 201
- Encode/Decode button, 152, 154–156, 159–164, 167, 179–180, 182–186
- encode() method, 151–155, 182–185
- equalsIgnoreCase() method, 34
- equals() method, 34, 276
- equal-to operator (==), 30, 276
- escape character sequence (\n), 107, 178
- event listeners, 62, 117. *See also* mouse events; touch events
  - for buttons, 62–64, 91–94
    - creating reusable, 211–212
    - for ENTER key, 103–104
- exception handlers, 70–72
- exceptions, 70
- /exit command, 16
- expressions, evaluating in JShell, 12–13
- extending classes, 49

## F

- fab (floating action button) icon, 84–85, 190–193
- fillOval() method, 204–205
- fillRect() method, 220, 247
- finally block, 71–72
- findViewById() method, 87
- floating action button (fab) icon, 84–85, 190–193
- floating-point numbers, 14
- FlowLayout value, 240
- focus, 69
- Font Chooser dialog (in Eclipse), 159
- for-each loops, 228, 263
- for loops, 129–134
- forward slashes (//), 23, 28

## G

- game loops (do-while loops), 33–35
- getHeight() method, 236–238
- getInt() method, 120
- getMenuInflater() method, 111
- getPointerCount() method, 266, 271
- getProgress() method, 186
- getSource() method, 235
- getStringExtra() method, 194
- getText() method, 59, 155, 185
- getUnitsToScroll() method, 216
- getValue() method, 167–168, 243
- getWidth() method, 236–238
- Graphics class, 204
- greater-than operator (>), 30, 60
- grouping symbols, 276–278
- Guess! button, 54–55, 62–63, 66–69, 82, 93, 99

## H

- Handler class, 253, 262
- "Hello, Java!" test code, 9
- /help command, 16
- HiLo class, 21–23
- Hi-Lo guessing game (Android mobile version)
  - adding method to begin new game, 90–91
  - adding method to check player's guess, 88–89
  - building GUI layout, 80–83

- changing guessing range, 114–117
    - adding variable, 115
    - dialog to allow user to select range, 116–117
    - modifying behavior of app to use variable, 115–116
  - changing number of tries, 122–123
  - event listeners, 91–94
  - options menu, 109–114
    - adding items to XML file, 110–111
    - alert dialog pop-up for About screen, 113–114
    - displaying, 111–112
    - responding to user selections, 112–113
  - ratio of wins to losses, 123
  - running in Android emulator, 94–99
  - running on real Android device, 100–102
  - setting up project, 76–80
  - storing game stats, 120–122
  - storing user preferences, 118–120
  - Toast messages, 106
  - UX improvements, 102–105
    - aligning text field, 104
    - centering input in text field, 103
    - event listener for ENTER key, 103–104
  - visual improvements, 107
  - wiring up, 83–88
  - Hi-Lo guessing game (command line version)
    - completed code for, 37–38
    - counting tries, 40–41
    - creating HiLo class, 21–23
    - creating new Java project, 20–21
    - generating random numbers, 23–25
    - getting keyboard input, 25–27
    - increasing range of numbers, 40
    - loops, 28–35
      - if statements, 30–32
      - play again feature, 33–35
    - making program print output, 27–28
    - overview of, 19–20
    - planning basic version of, 20
    - prompting for user input, 26
    - testing, 36–37
    - thank-you for playing, 36–37
  - Hi-Lo guessing game (GUI version)
    - adding method to check player's guess, 58
    - converting strings to numbers, 60–61
    - getting text from text field, 59–60
    - designing GUI, 50–58
      - aligning elements, 54–55
      - customizing components, 52–54
      - setting properties, 51–52
      - wiring up, 55–58
    - event listeners, 62–64
    - handling bad input, 69–72
    - new game (picking new random number), 61–62
    - play again feature, 66–67, 73–74
    - setting up GUI window, 64–65
    - setting up project, 48–49
    - showing and hiding Play Again button, 73–74
    - showing number of tries, 73
    - testing, 66
    - UX improvements, 67–70
      - automatically removing old guesses, 68–69
      - pressing ENTER to guess, 68
    - /history command, 16
- I**
- if-else statements, 31, 135
  - if statements, 30–32, 134
  - image editors, 268
  - ImageView class, 251, 253
  - /imports command, 16
  - increment operator (++), 129
  - indentation, 30, 35, 277
  - indexes, 129
  - inflate() method, 111
  - inheritance, 48
  - input dialogs, 163
  - Integer class, 60
  - int variable type (integer), 13
  - invalidate() method, 259, 263
  - isSpace() method, 135
  - <item> tag, 111
  - iteration, 128

## J

- JAR (Java archive) files, 169–171, 243
- Java, 1
  - as first programming language, xx
  - modifying Eclipse to run with Java 9, 5
  - as object-oriented programming language, 21
  - printing output in, 15
  - testing setup using JShell, 9–17
- Java archive (JAR) files, 169–171, 243
- Java Development Kit (JDK), 2–3, 10
- Java Perspective (in Eclipse), 21
- Java Runtime Environment (JRE)
  - software, 1–2, 141
- Java Virtual Machine (JVM) software,
  - 1–2, 141
- JButton component, 46, 52, 54, 63, 74, 151, 232
- JCheckBox component, 52
- JDK (Java Development Kit), 2–3, 10
- JFrame class, 44, 48–49, 199, 223
- JLabel component, 52–54, 57, 61, 74, 151, 240
- JOptionPane component, 164
- JPanel component, 46, 198–199, 207–208, 232, 240
- JRE (Java Runtime Environment)
  - software, 1–2, 141
- JScrollPane component, 173–174
- JShell, 9
  - commands, 16–17
  - creating GUIs in, 44–47
  - declaring Java variables in, 13–15
  - evaluating Java expressions in, 12–13
  - "Hello, Java!" test code, 9
  - opening code in, 16
  - printing output, 15
  - running, 9–11
    - from command line, 10–11
    - confirming installed version of JDK, 10
    - from shortcut, 11–12
  - saving code created in, 16
  - starting new code snippets, 17
  - testing Java setup, 9–17
- JShell Edit Pad, 46–47
- JSlider component, 164–167
- JTextArea component, 150–152
  - scroll bars for, 173–174
  - wrapping text, 162

- JTextField component, 52–53, 56–57, 59–60, 68–69, 151–152
- JVM (Java Virtual Machine) software,
  - 1–2, 141

## K

- key/value pairs, 118

## L

- labels
  - adding, 52–54, 81–82
  - alignment, 53
  - editing, 53, 81–82
  - font, 53
  - naming for coding, 56
- length() method, 129–131
- less-than operator (<), 30, 60
- lineWrap property, 162
- /list command, 16
- logarithms, 123
- log() method, 123
- loops, 28–35, 144–145
  - do-while loops, 33–35
  - for-each loops, 228, 263
  - for loops, 129–134
  - nested, 38
  - while loops, 28–30

## M

- MadLibs class, 41
- MadLibs game
  - Android mobile version, 107
  - command line version, 41
  - GUI version, 74
- main() method
  - BubbleDraw app
    - desktop version, 210
    - GUI version, 222–223
  - Hi-Lo guessing game
    - command line version, 22–23, 25, 29, 35
    - GUI version, 48, 64–65
  - Secret Messages app
    - command line version, 127–128, 135–136
    - GUI version, 148, 156–157
- majorTickSpacing property, 165, 241
- makeText() method, 106
- manifest file, 193



- Math class, 23
- math expressions, 12
- MenuInflater class, 111
- <menu> tag, 110–111
- message dialogs, 163–164
- methods, 22, 200–210
  - designing, 202–205, 207–208
  - displaying available methods with content assist, 68–69
- method signature, 207
- minorTickSpacing property, 165, 241
- modulo operator (%), 139
- MouseAdapter class, 212
- mouseClicked() method, 212
- mouseDragged() method, 214–215
- MouseEvent class, 212–213
- mouse events, 210–217
  - clicks, 212–214
  - creating reusable event listener, 211–212
  - drags, 214–215
  - wheel events, 215–217
- mouseMoved() method, 214
- mousePressed() method, 212–214
- mouseReleased() method, 212
- MouseWheelEvent class, 215–216
- mouseWheelMoved() method, 216, 218
- Move Up ^ button, 172–173, 196
- multitasking, 249, 261–264
- multitouch, 249, 266–267

## N

- \n (escape character sequence), 107, 178
- nested loops, 38
- newGame() method, 61–62, 64, 66–67, 90, 113–115, 120
- New Java Class dialog (in Eclipse), 22–23, 49, 148
- New Java Project dialog (in Eclipse), 20–21
- newline character, 107, 178
- nextInt() method, 25, 27–28, 203–204, 224, 231
- nextLine() method, 25, 128
- not-equal-to operator (!=), 29
- numeric variables, 13–14

## O

- object-oriented programming, 21, 198
- objects, 21

- OK button, 114
- OnClickListener event handler class, 91–92, 184
- onClick() method, 93, 114, 184–185, 191
- onCreate() method, 87, 90–91, 115, 120, 182, 191
- onCreateOptionsMenu() method, 111
- onDraw() method, 257–258, 263
- online resources, xxi–xxii
- onOptionsItemSelected() method, 112, 116, 118–119, 121
- onProgressChanged() method, 188
- OnSeekBarChangeListener event handler, 187–188
- onStartTrackingTouch() method, 188
- onStopTrackingTouch() method, 188
- OnTouchListener interface, 251–252, 259–260
- onTouch() method, 259–260, 264–265, 271
- /open command, 16
- operators

- arithmetic (+, -, \*, /), 12
- assignment (=), 13–15, 245, 276
- comparison
  - equal to (==), 30, 276
  - greater than (>), 30, 60
  - less than (<), 30, 60
  - not equal to (!=), 29
- concatenation, 12–13, 27, 30, 130–131
- decrement (--), 130
- dot (.), 59, 68
- increment (++), 129
- modulo (%), 139

- options menu, adding in Android, 109–114
  - adding items to XML file, 110–111
  - alert dialog pop-up for About screen, 113–114
  - displaying, 111–112
  - responding to user selections, 112–113

## P

- package declarations, 85–86
- Paint class, 253
- paintComponent() method, 207
- parameters, 153
- parent classes (superclasses), 48
- parseInt() method, 155, 185

- parsing, 60
- Pause/Start button, 232–235
- persistent information, storing, 118–121
- pixelated effect, 219–220, 245–247
- Play Again button, 66, 73–74
- pointers, 266
- postDelayed() method, 263
- println() method, 15, 26–27
- private modifier, 57
- procedural programming, 198
- public modifier, 58

## R

- Random class, 203
- random() method, 24, 203
- range settings dialog, 116–117
- refactoring, 223
- RelativeLayout value, 255
- repaint() method, 209, 213, 215, 228, 234
- requestFocus() method, 164
- /reset command, 16
- resource leaks, 37, 135
- return statement, 113
- run() method, 262
- Runnable interface, 262

## S

- /save command, 16
- Scanner class, 25, 37
- scrolling
  - different operating systems and, 216–217
  - mouse wheel events, 215–217
  - scroll bars, 173–174
- SDK (software development kit)
  - levels, 78
- Secret Messages app (Android mobile version)
  - connecting Encode button to encode() method, 182–185
  - customizing fab icon, 190–193
  - designing GUI, 177–181
  - Move Up ^ button, 196
  - receiving secret messages from other apps, 193–195
  - running in Android emulator, 188–189

- running on real Android device, 188–190
- SeekBar component, 187–188, 196
- setting up project, 176–177
- testing, 185–187
- wiring up, 182–188
- Secret Messages app (command line version)
  - adding loops to, 144–145
  - Caesar cipher, 125–126
  - character values, 132–133
  - closing all input/output resources, 135–136
  - custom key values, 137–138
  - encoding digits, 138–141
  - encoding only letters, 133–135
  - full version of, 140–141
  - languages other than English, 135
  - reversing and encoding, 145
  - setting up project, 126–131
    - asking user for input, 128
    - creating project in Eclipse, 127
    - message reverser, 128–131
    - strings, 128–131
  - try-catch blocks, 145
- Secret Messages app (GUI version)
  - building main() method, 156–157
  - creating encode() method, 151–154
  - designing GUI, 148–151
  - event handling, 154–156
  - full source code, 157–159
  - handling bad input, 156, 162–164
  - improving GUI, 159–169
  - line and word wrap, 161–162
  - Move Up ^ button, 172–173
  - numeric slider
    - adding, 164–166
    - code cracking with, 166, 168–169
    - moving when value in text field changes, 174
  - scroll bars, 173–174
  - setting up project, 148
  - sharing as runnable JAR file, 169–171
  - wiring up, 148–151
- SecretMessagesGUI class, 152
- SeekBar component, 179–180, 187–188, 196
- selectAll() method, 69, 164

- Select Deployment Target dialog (in Android Studio), 98, 198
- semicolon (;), 24
- setBackground() method, 207
- setButton() method, 114
- setColor() method, 204
- setItems() method, 117
- setOnClickListener() method, 183–184, 191
- setOnSeekBarChangeListener() method, 187
- setOnTouchListener() method, 265
- setSize() method, 64
- setText() method, 61, 107, 156, 167
- setVisible() method, 45, 65
- shared preferences, 118–121
- showMessageDialog() method, 163
- show() method, 106
- sliders
  - numeric
    - adding, 164–166
    - code cracking with, 166, 168–169
    - moving when value in text field changes, 174
    - speed control, 240–243
      - customizing, 241
      - event handler, 242–243
- smart completion, 278
- Snackbar pop-up messages, 191
- software development kit (SDK)
  - levels, 78
- spelling errors, 274–276
- src (source code) folder, 22, 48, 127, 141, 148
- start() method, 229
- stateChanged() method, 166–167, 242
- statement completion, 278
- stop() method, 229
- storeRange() method, 119
- strings, 12
- String variable type, 14–15, 33
- stubs, 22
- superclasses (parent classes), 48
- super() method, 253
- switch statement, 113
- syntax coloring, 273
- System class, 26
- System.in object, 25
- System.out object, 26

## T

- temporary variables, 12
- Terminal, 142
- testBubbles() method, 208–210, 213, 258–259, 265
- Text class, 88
- text fields
  - adding, 82
  - aligning, 104
  - centering input in, 103
  - declaring at top level of class, 56–57
  - getting text from, 59
  - sizing, 83
  - wiring up, 55–56, 83–84
- TextView component, 81–82, 84, 87, 104, 107, 114–116, 177
- Thread class, 262
- threading, 249, 261–264
- threads, 253
- tilde (~), 16
- Timer class, 225–227
- title property, 51
- Toast messages, 106
- toString() method, 88, 185
- touch events, 251–252, 259–260, 264–267, 271–272
- transparency, 224–225
- try-catch statements, 71–72, 145, 156, 162–163
- type casts (casts), 24, 132

## U

- undo, 55
- Unicode, 132
- update() method, 228, 237–238, 255
- USB debugging in Android, 100–101
- user experience (UX), 67

## V

- variables
  - declaring and initializing, 26
  - declaring at top level of class, 56–58
  - declaring in JShell, 13–15
  - temporary, 12
- /vars command, 16
- void modifier, 58

## W

- what-you-see-is-what-you-get  
    (WYSIWYG) interfaces, 50
- while loops, 28–30
- wildcard character (\*), 46
- WindowBuilder Editor (in Eclipse),  
    50–52
  - Design tab, 50
  - installing, 6–7
  - Palette pane, 52–54
  - Properties pane, 51–52
  - Source tab, 56
- windows
  - close operation, 51–52
  - content panes, 52
  - creating, 44–45
  - sizing, 64
  - titles, 51
- wrapStyleWord property, 162
- WYSIWYG (what-you-see-is-what-you-get) interfaces, 50